

00500T 01218960

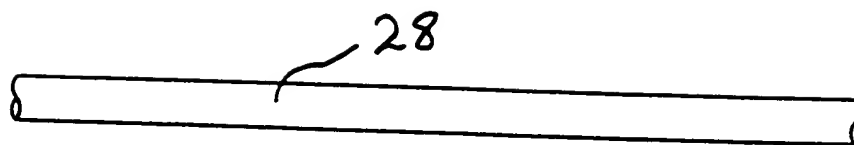


FIG. 1

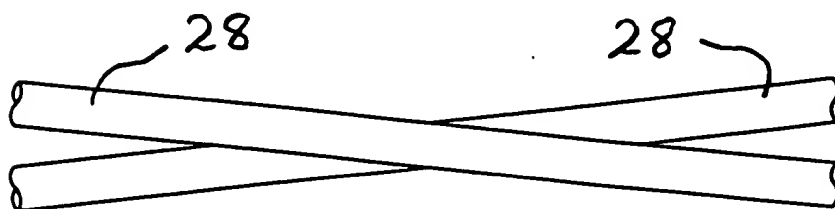


FIG. 2

009007" B7278960



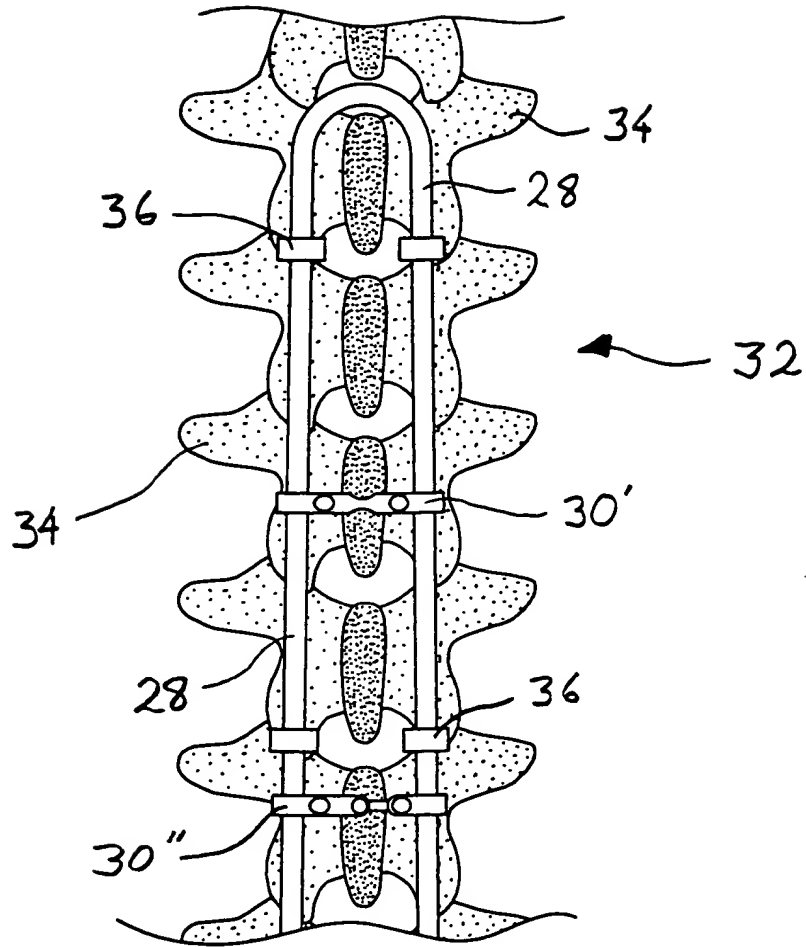


FIG. 3

009001-0248960

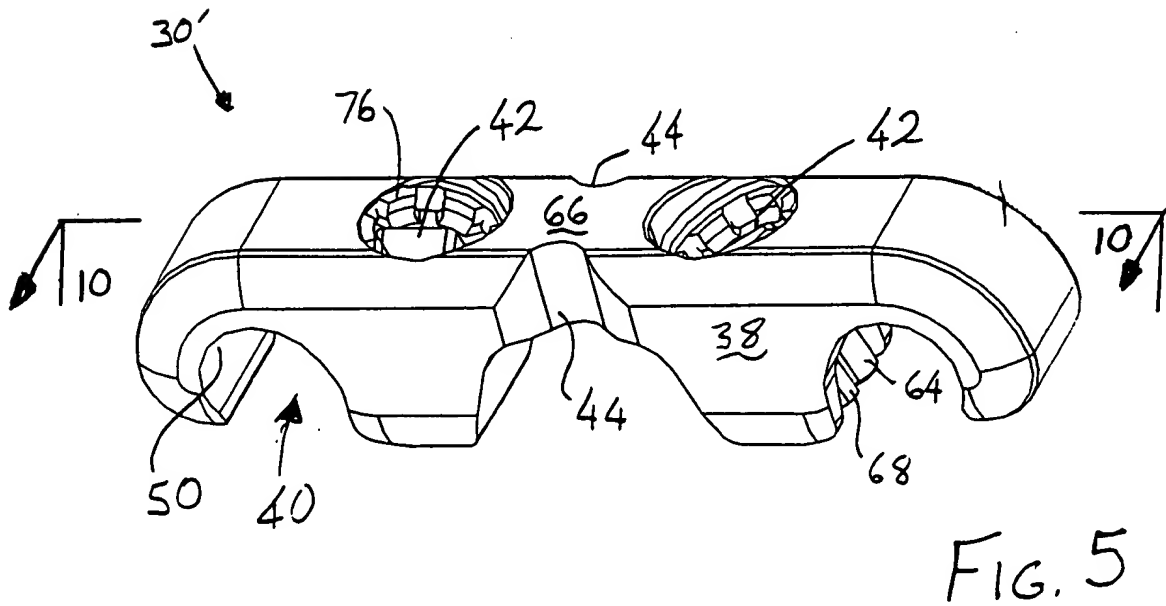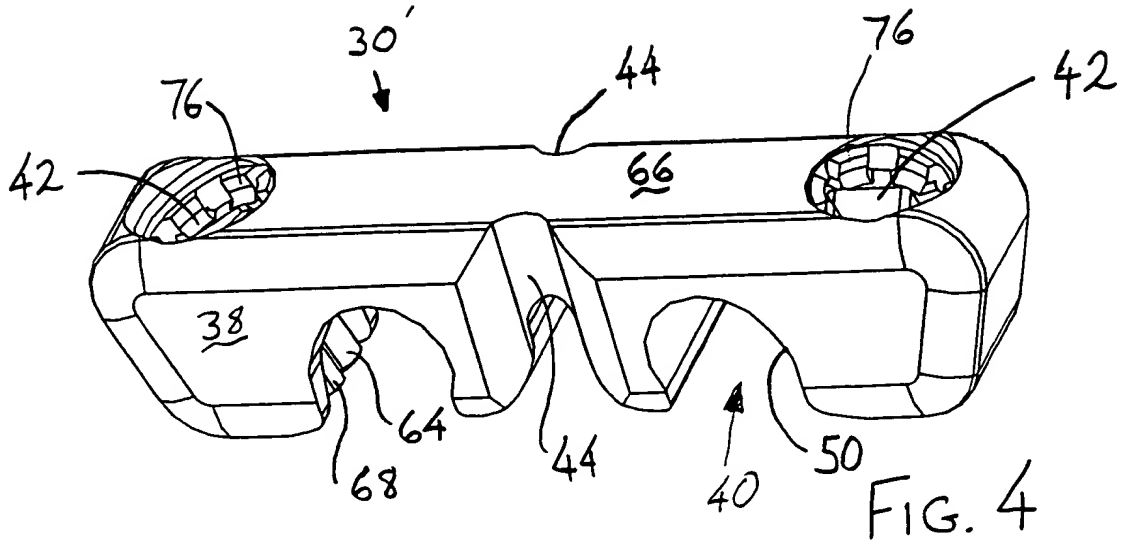

This diagram shows an exploded perspective view of a mechanical assembly, designated by the reference numeral 30. The assembly includes a main body 38 with a central cylindrical opening 112. A cylindrical component 110 is positioned to fit into this opening. A flange 108 is located at the base of the main body. A cap 40 is shown with a flange 48 and a central opening 50. A nut 42 is shown with a flange 46 and a central opening 64. A washer 66 is shown with a central opening 66. A bolt 106 is shown with a head 116 and a threaded shaft 108. The assembly is shown in a disassembled state, with arrows indicating the relative positions of the components.

FIG. 7

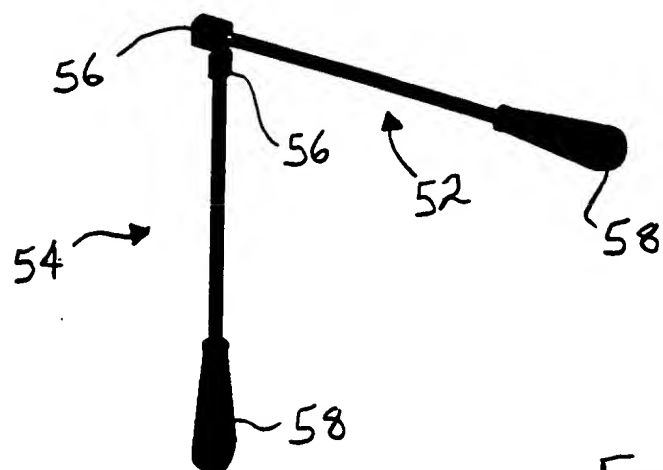


FIG. 8

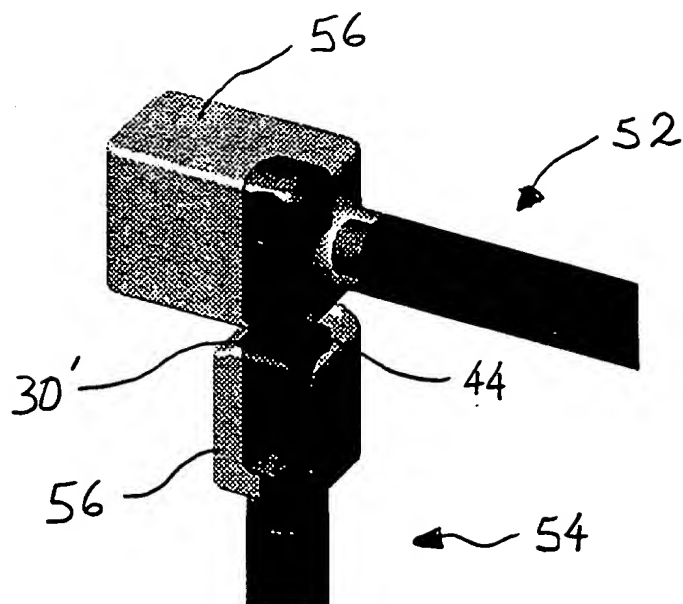


FIG. 9





009001-01243960

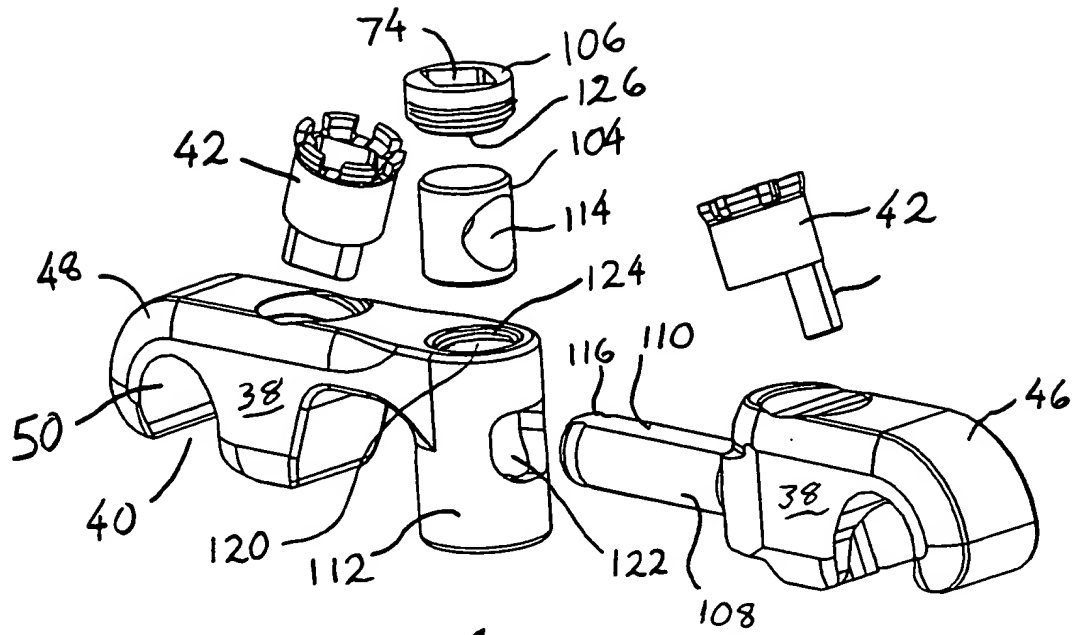


FIG. 17 30"

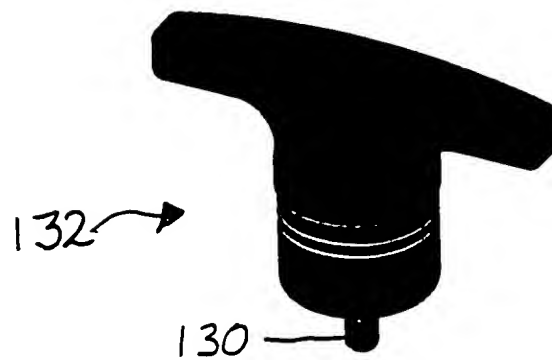


FIG. 18



THE UNIVERSITY OF CHICAGO LIBRARY  
1100 EAST 58TH STREET  
CHICAGO, ILL. 60637

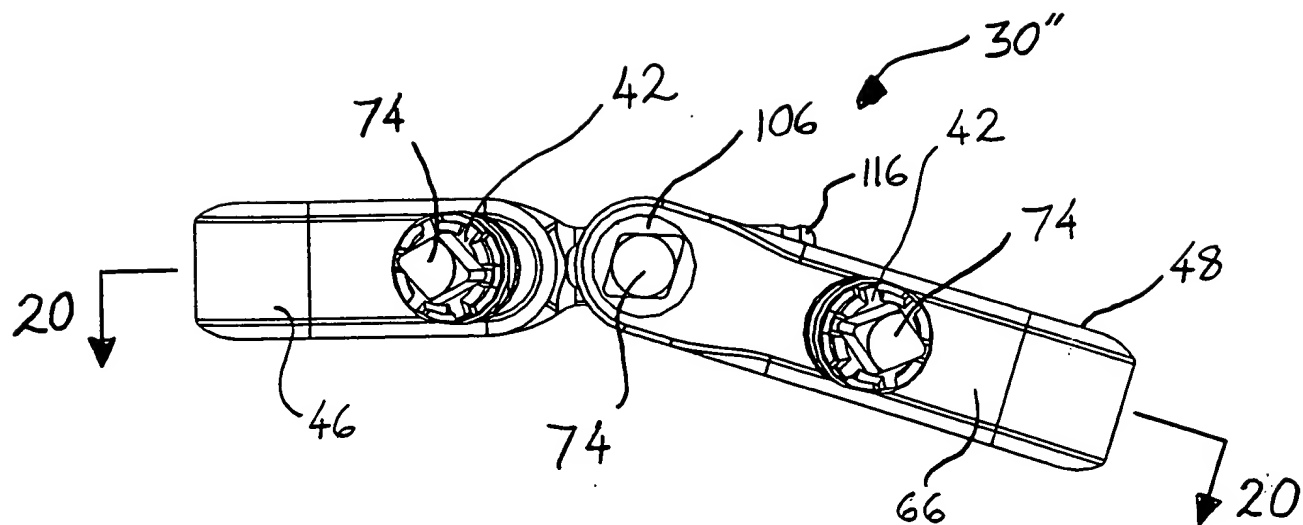


FIG. 19



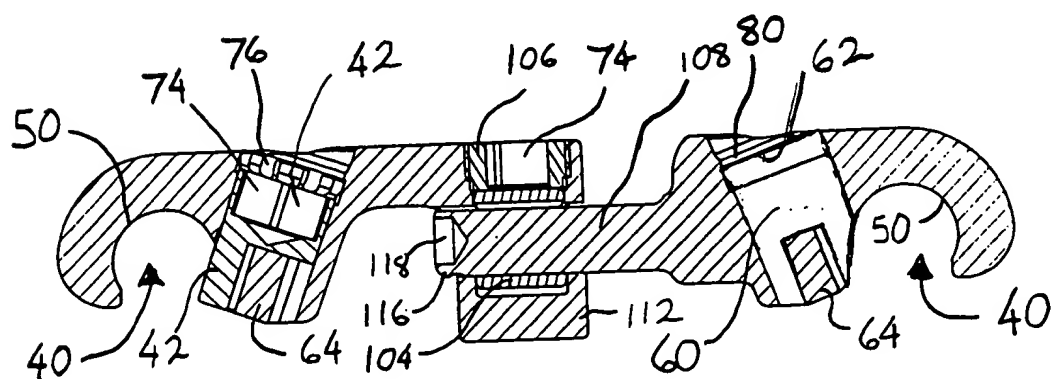


FIG. 20

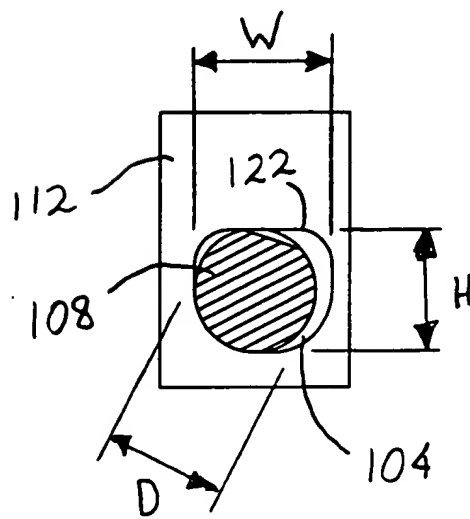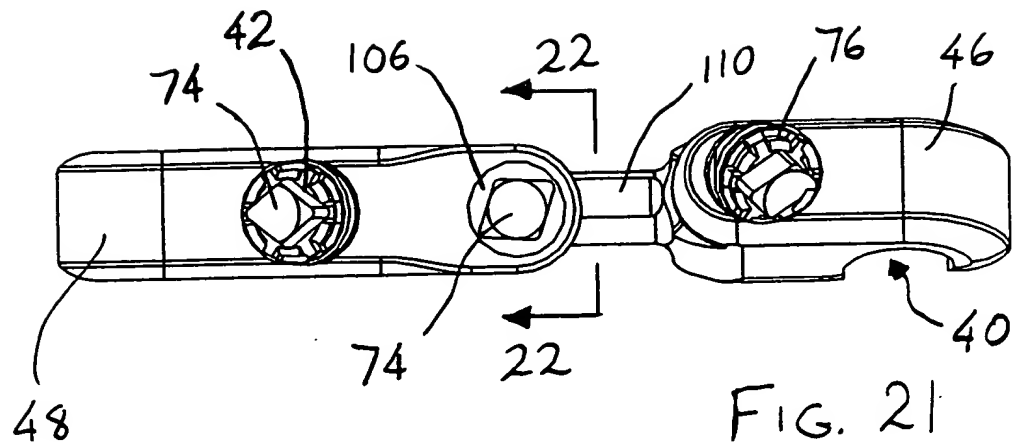

009900T 07248960

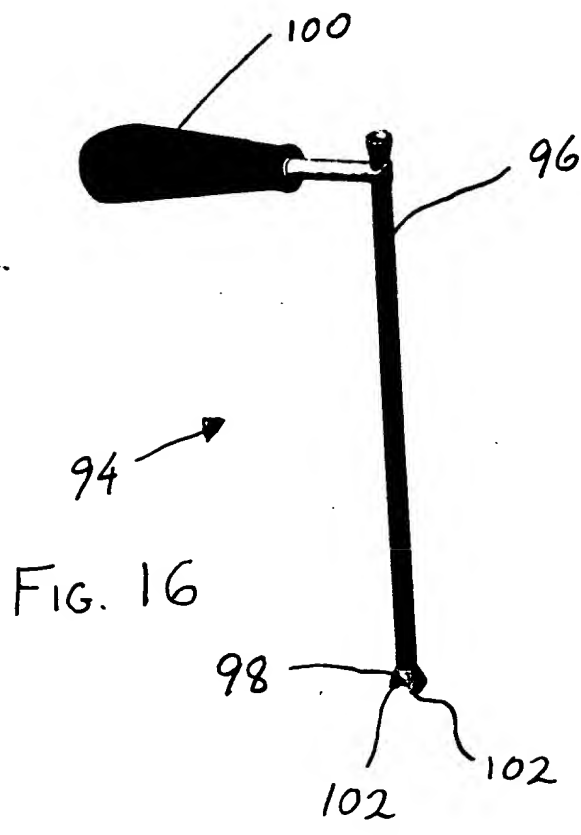


FIG. 16

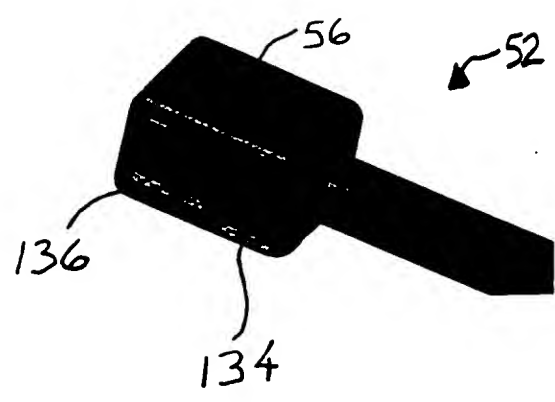


FIG. 23

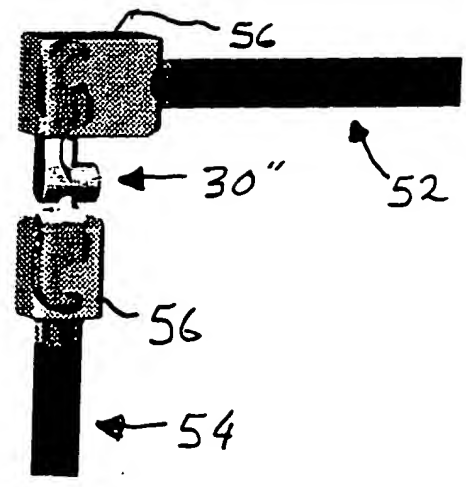


FIG. 24

009007" 0248960

